

 FUZETEC TECHNOLOGY CO., LTD.						NO.	FMOV05-D Series			
Product Specification and Approval Sheet						Version	2	Page	1/14	

MOV Varistor Device: FMOV05-D Series

1. Device Ratings and Characteristics

Part Number	Maximum Continuous Voltage		Varistor Voltage (@1mA)			Maximum Clamping Voltage @Test Current (@8/20μs)		Maximum Energy (@10/1000μs)	Maximum Peak Current (@8/20μs)	Rated Power	Typical Capacitance (@1KHz)
	ACrms(V)	DC(V)	Vn(Vdc)	Min.	Max.	Vc(V)	Ip(A)	(J)	(A)	(W)	(pF)
FMOV05180-D	11	14	18	16	20	40	1	0.4	100	0.01	1600
FMOV05220-D	14	18	22	20	24	48	1	0.5	100	0.01	1500
FMOV05270-D	17	22	27	24	30	60	1	0.6	100	0.01	1450
FMOV05330-D	20	26	33	30	36	73	1	0.8	100	0.01	1400
FMOV05390-D	25	31	39	35	43	86	1	0.9	100	0.01	700
FMOV05470-D	30	38	47	42	52	104	1	1.1	100	0.01	650
FMOV05560-D	35	45	56	50	62	123	1	1.3	100	0.01	600
FMOV05680-D	40	56	68	61	75	150	1	1.6	100	0.01	580
FMOV05820-D	50	65	82	74	90	145	5	2.5	400	0.10	310
FMOV05101-D	60	85	100	90	110	175	5	3.0	400	0.10	290
FMOV05121-D	75	100	120	108	132	210	5	4.0	400	0.10	270
FMOV05151-D	95	125	150	135	165	260	5	4.8	400	0.10	240
FMOV05181-D	115	150	180	162	198	315	5	5.9	400	0.10	140
FMOV05201-D	130	170	200	180	220	355	5	6.5	400	0.10	120
FMOV05221-D	140	180	220	198	242	380	5	7.0	400	0.10	110
FMOV05241-D	150	200	240	216	264	415	5	8.0	400	0.10	110
FMOV05271-D	175	225	270	243	297	475	5	8.5	400	0.10	100
FMOV05301-D	195	250	300	270	330	505	5	9.0	400	0.10	100
FMOV05331-D	215	275	330	297	363	585	5	10.0	400	0.10	90
FMOV05361-D	230	300	360	324	396	620	5	10.0	400	0.10	80
FMOV05391-D	250	320	390	351	429	675	5	12.0	400	0.10	80
FMOV05431-D	275	350	430	387	473	745	5	13.0	400	0.10	70
FMOV05471-D	300	385	470	423	517	810	5	15.0	400	0.10	70
FMOV05511-D	320	410	510	459	561	878	5	16.0	400	0.10	65
FMOV05561-D	350	460	560	504	616	940	5	18.0	400	0.10	65
FMOV05621-D	395	510	620	558	682	1050	5	18.0	400	0.10	65
FMOV05681-D	420	560	680	612	748	1120	5	18.0	400	0.10	60
FMOV05751-D	460	615	750	675	825	1240	5	18.0	400	0.10	60

NOTE : Specification subject to change without notice.

2025/5/8

 FUZETEC TECHNOLOGY CO., LTD.	NO.	FMOV05-D Series		
Product Specification and Approval Sheet	Version	2	Page	2/14

2. Agency Approvals

Agency	Agency Approvals	Certificate No.
	UL1449 4 th & cUL	VZCA2.E515006 VZCA8.E515006
	IEC 61051-1:2007 IEC 61051-2:1991 IEC 61051-2:1991/AMD1:2009 IEC 61051-2-2:1991 IEC 61051-1:2007 IEC 61051-2:1991 IEC 62368-1:2018/G.8.1 IEC 60950-1:2005/AMD1:2009/AMD2:2013, Annex Q	40053039

*FMOV05820-D ~ FMOV05751-D meets VDE.

3. Max Rating

	FMOV-D Series	Units
Operation Ambient Temperature Range	-40 to +105	°C
Storage Temperature Range	-40 to +125	°C
Insulation Resistance	>1000	MΩ
Typical Response Time	<25	ns

NOTE : Specification subject to change without notice.

2025/5/8

 FUZETEC TECHNOLOGY CO., LTD.	NO.	FMOV05-D Series		
Product Specification and Approval Sheet	Version	2	Page	3/14

4. Reliability

Characteristics	Standard	Test Conditions	Specifications
Robustness of terminations	IEC 60068-2-21 Test Ua1	F = 10 N (d ≤ 0.8 mm) , F = 20 N (d = 1 mm)	$\Delta V_{1mA} / V_{1mA} \leq \pm 10\%$ No visible damage
Solderability	IEC 60068-2-20 Test Ta (Method 1)	T = 235±5°C, d = 2±0.5s	Approximately ≥ 95%
Resistance to soldering heat	IEC 60068-2-20 Test Tb (Method 1A)	T = 260±5°C, d = 10±1s	$\Delta V_{1mA} / V_{1mA} \leq \pm 5\%$ No visible damage
Shock	IEC 60068-2-27 Test Ea	Pulse shape: half-sine. a = 490 m/s ² , d = 11ms. N = 6 x 3 shocks	$\Delta V_{1mA} / V_{1mA} \leq \pm 5\%$ No visible damage
Vibration	IEC 60068-2-6 Test Fc Method B4	Frequency range: 10 Hz to 55 Hz ,a = 0.75 mm or 98 m/s ² (whichever is the less), d = 3x2 h	$\Delta V_{1mA} / V_{1mA} \leq \pm 5\%$ No visible damage
Needle flame test	IEC 60695-11-5	Severity: Vertical 10 s	Duration of burning: 5 s max.
Voltage under pulse condition	IEC 61051-2	At class current, 8/20 μs,	As specified in specification
Voltage proof	IEC 61051-2	Metal balls method (4.8.1.2) 2500 V, 60 s	No breakdown or flashover
Pulse current - 8/20 μs	IEC 61051-2	8/20 μs, 10 times, I _{peak} =0.25*I _{max}	$\Delta V/V \leq \pm 10\%$ No visible damage
Pulse current - 10/1000 μs	IEC 61051-2	10/1000 μs, 10 times, I _{peak} = 0.0075* I _{max}	$\Delta V_{1mA} / V_{1mA} \leq \pm 10\%$ No visible damage
Combination pulse	IEC 62368-1	Additional test: 10 pulses (combination pulse 6KV/3KA), in one direction, 1 per min	$\Delta V_{1mA} / V_{1mA} \leq \pm 10\%$ No visible damage U ≤ 1.1 U _{initial} Voltage proof: No breakdown or flashover
Rapid change of temperature	IEC 60068-2-14 Test Na	N = 5 cycles, d = 30 min , θA = -40±3°C, θB = 85±2°C	$\Delta V_{1mA} / V_{1mA} \leq \pm 10\%$ No visible damage
Climatic sequence	IEC 60068-2-2 Test Ba IEC 60068-2-30 Test Db IEC 60068-2-1 Test Aa IEC 60068-2-30 Test Db	Dry heat, Test Ba:16±2h, T = 85±2°C Damp heat, Test Db first cycle :24h, T = 55±2°C Cold, Test Aa :2h, T = -40±3°C Damp heat Test Ba remaining cycles:5 cycle	$\Delta V_{1mA} / V_{1mA} \leq \pm 10\%$ No visible damage R _{ISO} ≥ 100MΩ Voltage proof: No breakdown or flashover
Endurance at upper category temperature	IEC 61051-1 (4.21)	T: max temperature as specified , Duration: 1000 h, Voltage: max. a. c. voltage	$\Delta V/V \leq \pm 10\%$ No visible damage R _{ISO} ≥ 1000MΩ U ≤ 1,1 U _{initial}

NOTE : Specification subject to change without notice.

 FUZETEC TECHNOLOGY CO., LTD.	NO.	FMOV05-D Series		
Product Specification and Approval Sheet	Version	2	Page	4/14

Characteristics	Standard	Test Conditions	Specifications
Damp heat (Steady state)	IEC 60068-2-78 Test Ca	T = 40±2°C, RH = 93(+2/-3)%, 56d , 4 specimens: No voltage applied ,Other 4 specimens: Applied voltage: 10% of the max. d. c. voltage	$\Delta V_{1mA}/V_{1mA} \leq \pm 10\%$ $R_{ISO} \geq 100M\Omega$
Maximum Peak Current	Specification Standard	I _{max} , 8/20 μs, 1 time.	$\Delta V_{1mA}/V_{1mA} \leq \pm 10\%$ No visible damage
Nominal Discharge Current Test	UL1449 4th	I _n , 8/20 μs, 15 times, Interval 60s	$\Delta V/V \leq \pm 10\%$ No visible damage
Varistor Voltage Temp. Coefficient	Specification Standard	$\frac{V_{mAat\ 85^{\circ}C} - V_{mAat\ 25^{\circ}C}}{V_{mAat\ 25^{\circ}C}} \times \frac{1}{60} \times 100(\%/^{\circ}C)$	$0.05 \leq TC \leq 0.05(\%/^{\circ}C)$
High Temperature Storage	IEC60068-2-2	1000h, T = 125±2°C	$\Delta V/V \leq \pm 5\%$ No visible damage
Max. Energy	Specification Standard	10/1000 μs, 1 times, Max. Energy	$\Delta V/V \leq \pm 10\%$ No visible damage
Operating duty cycle test *	UL1449	6 kV/3 kA combination wave surges, phase angle of 90 (+0, -15) degrees, positive polarity 8times, negative polarity 7 times, interval of 60s.	$\Delta V/V \leq \pm 10\%$ No visible damage
Surge Immunity Test *	IEC 61000-4-5	4kV/2kA combination wave surges, phase angle of 90 (+0, -15) degrees, positive polarity 20times, negative polarity 20times, interval of 60s.	$\Delta V/V \leq \pm 10\%$ No visible damage


* (According to customer requirements to meet the test items)




5. Impulse Life Time Rating Curves

FMOV05-D Series

FMOV05180-D to FMOV05680-D

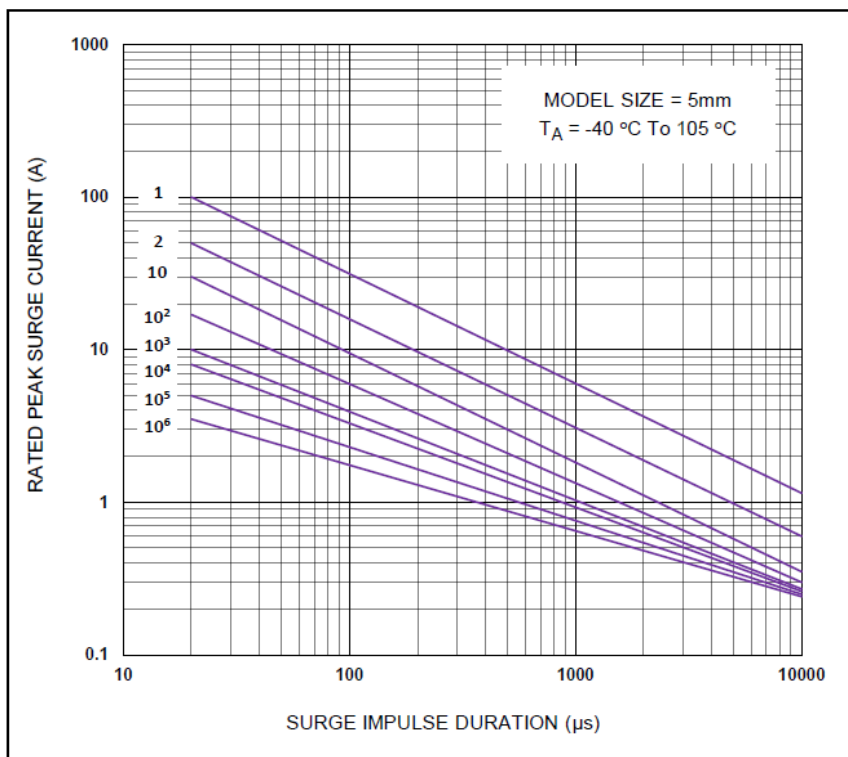

FMOV05820-D to FMOV05751-D

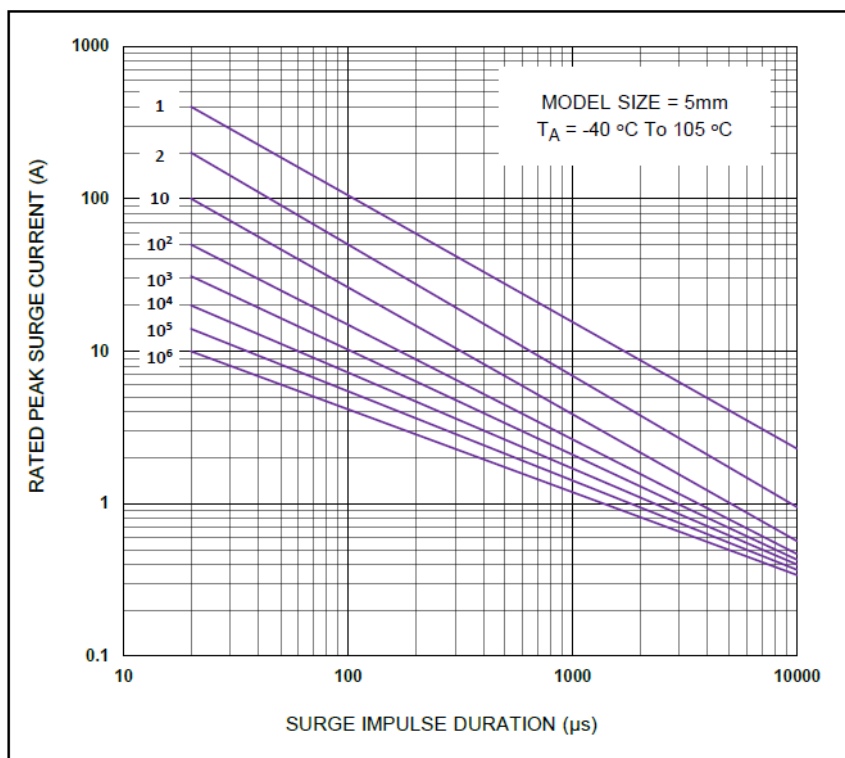


NOTE : Specification subject to change without notice.




6. V-I Curves

(FMOV05180-D to FMOV05680-D)

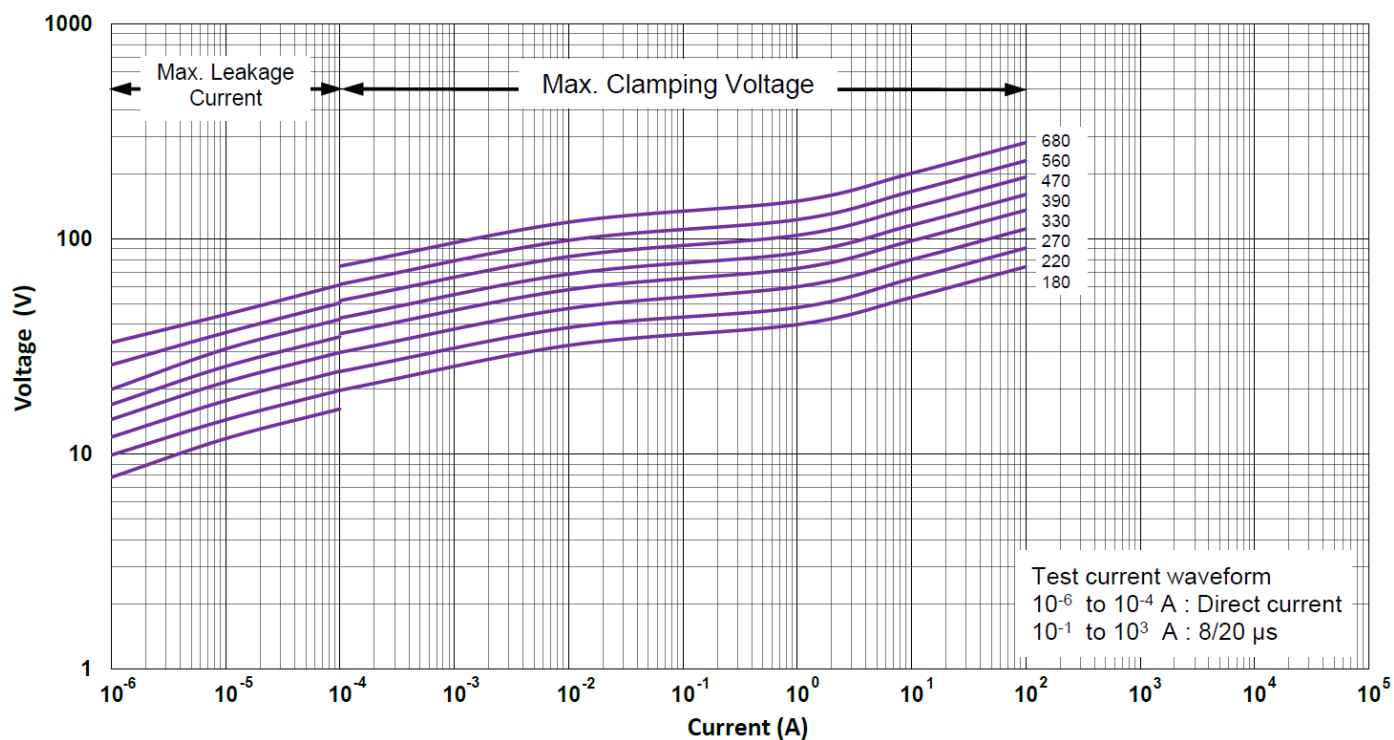


(FMOV05820-D to FMOV05751-D)

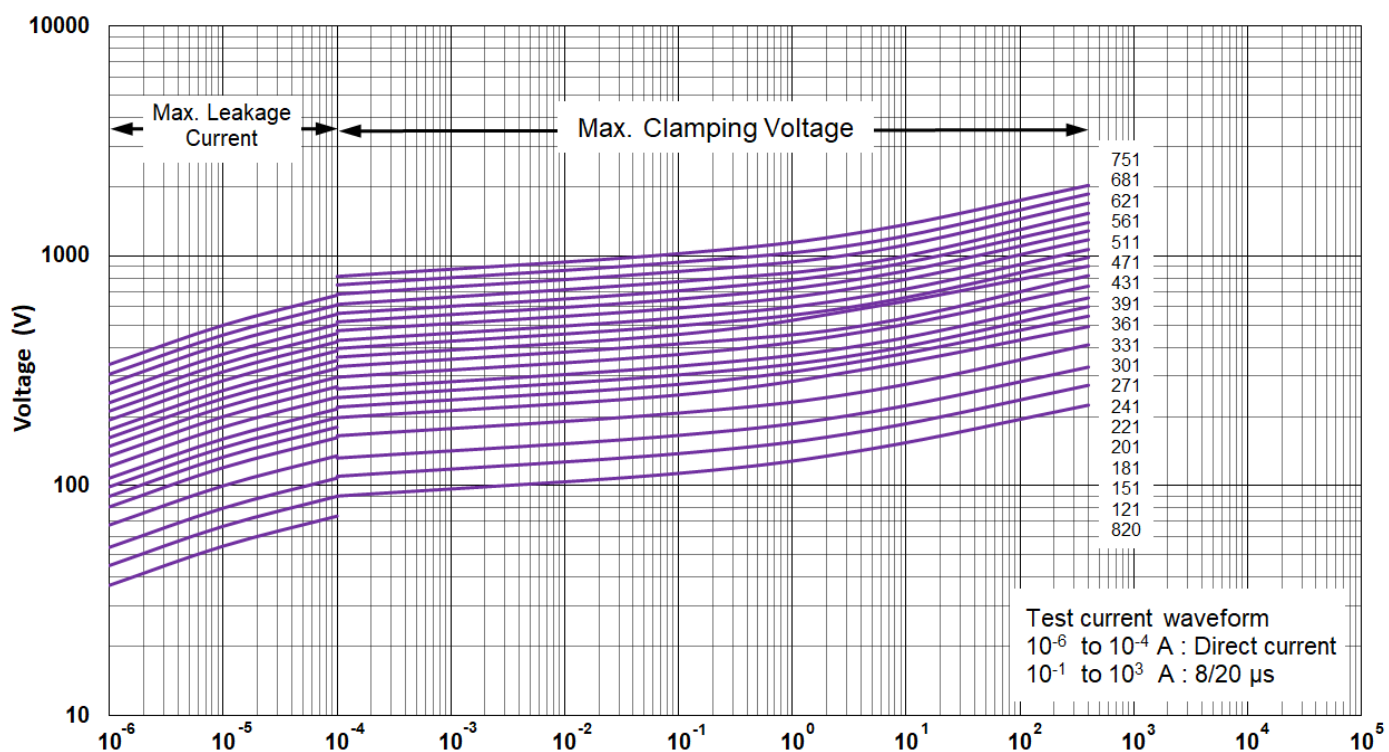




7. Power Derating Curve

Should transients occur in rapid succession, the average power dissipation is the energy (watt-seconds) per pulse times the number of pulses per second. The power so developed must be with the specifications shown on the Device Ratings and Specifications Table for the specific device. The operating values of a MOV need to be derated at high temperatures as shown above. Because varistors only dissipate a relatively small amount of average power they are not suitable for repetitive applications that involve substantial amounts of average power dissipation.

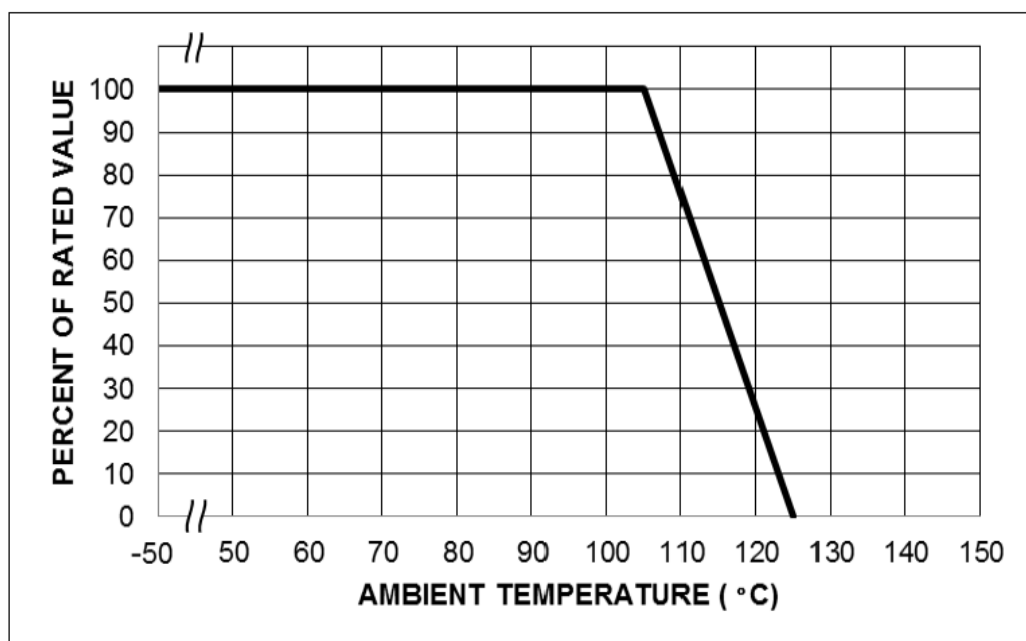

8. Surge Current Standard Waveform

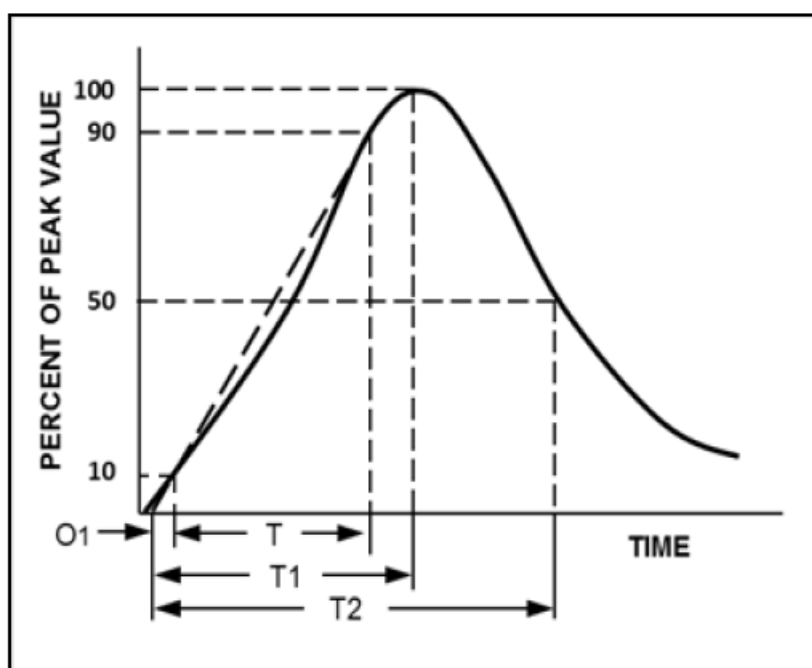

O1 = Virtual Origin of Wave

T = Time from 10% to 90% of Peak

T1 = Rise Time = $1.25 \times T$

T2 = Decay Time


Example - For an 8/20 μ s Current Waveform:

8 μ s = T1 = Rise Time

20 μ s = T2 = Decay Time

 FUZETEC TECHNOLOGY CO., LTD.	NO.	FMOV05-D Series		
Product Specification and Approval Sheet	Version	2	Page	8/14

9. Dimension of Component for Standard Product

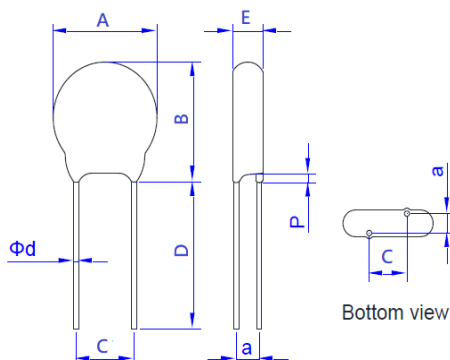


Straight Lead Type (S)

Part Number	A		B	C	D	E	P	a	Φd
	Min.	Max.	Max.	±1.0	Typ.	Max.	Max.	±1.0	±0.05
FMOV05180-D	5.5	7.5	10.0	5.0	25.0	3.3	3.0	1.5	0.60
FMOV05220-D	5.5	7.5	10.0	5.0	25.0	3.6	3.0	1.6	0.60
FMOV05270-D	5.5	7.5	10.0	5.0	25.0	3.8	3.0	1.7	0.60
FMOV05330-D	5.5	7.5	10.0	5.0	25.0	3.3	3.0	1.6	0.60
FMOV05390-D	5.5	7.5	10.0	5.0	25.0	3.5	3.0	1.8	0.60
FMOV05470-D	5.5	7.5	10.0	5.0	25.0	3.7	3.0	1.9	0.60
FMOV05560-D	5.5	7.5	10.0	5.0	25.0	4.0	3.0	2.0	0.60
FMOV05680-D	5.5	7.5	10.0	5.0	25.0	4.3	3.0	2.2	0.60
FMOV05820-D	5.5	7.5	10.0	5.0	25.0	3.3	3.0	1.5	0.60
FMOV05101-D	5.5	7.5	10.0	5.0	25.0	3.6	3.0	1.5	0.60
FMOV05121-D	5.5	7.5	10.0	5.0	25.0	3.8	3.0	1.6	0.60
FMOV05151-D	5.5	7.5	10.0	5.0	25.0	4.1	3.0	1.8	0.60
FMOV05181-D	5.5	7.5	10.0	5.0	25.0	3.2	3.0	1.5	0.60
FMOV05201-D	5.5	7.5	10.0	5.0	25.0	3.3	3.0	1.5	0.60
FMOV05221-D	5.5	7.5	10.0	5.0	25.0	3.4	3.0	1.6	0.60
FMOV05241-D	5.5	7.5	10.0	5.0	25.0	3.5	3.0	1.7	0.60
FMOV05271-D	5.5	7.5	10.0	5.0	25.0	3.7	3.0	1.8	0.60
FMOV05301-D	5.5	7.5	10.0	5.0	25.0	3.9	3.0	1.9	0.60
FMOV05331-D	5.5	7.5	10.0	5.0	25.0	4.0	3.0	2.0	0.60
FMOV05361-D	5.5	7.5	10.0	5.0	25.0	4.1	3.0	1.7	0.60
FMOV05391-D	5.5	7.5	10.0	5.0	25.0	4.2	3.0	1.8	0.60
FMOV05431-D	5.5	7.5	10.0	5.0	25.0	4.4	3.0	1.9	0.60
FMOV05471-D	5.5	7.5	10.0	5.0	25.0	4.6	3.0	2.0	0.60
FMOV05511-D	5.5	7.5	10.0	5.0	25.0	4.8	3.0	2.2	0.60
FMOV05561-D	5.5	7.5	10.0	5.0	25.0	5.0	3.0	2.3	0.60
FMOV05621-D	5.5	7.5	10.0	5.0	25.0	5.3	3.0	2.5	0.60
FMOV05681-D	5.5	7.5	10.0	5.0	25.0	5.4	3.0	2.7	0.60
FMOV05751-D	5.5	7.5	10.0	5.0	25.0	5.6	3.0	2.9	0.60

Unit: mm

 FUZETEC TECHNOLOGY CO., LTD.	NO.	FMOV05-D Series		
Product Specification and Approval Sheet	Version	2	Page	9/14

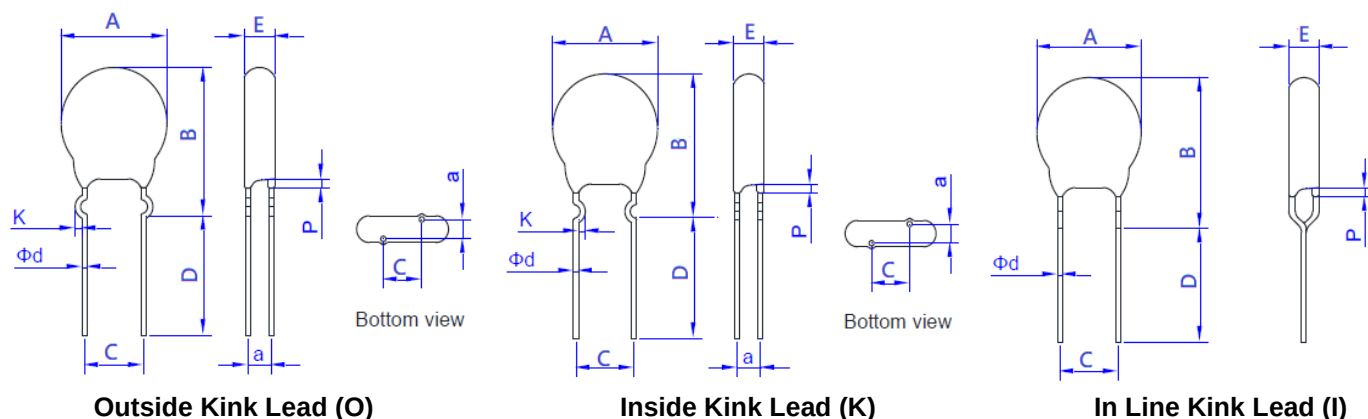

Part Number	A		B	C	D	E	P	K		a	Φd
	Min.	Max.	Max.	± 1.0	Typ.	Max.	Max.	Min.	Max.	± 1.0	± 0.05
FMOV05180-D	5.5	7.5	13.0	5.0	25.0	3.3	3.0	0.8	1.6	1.5	0.60
FMOV05220-D	5.5	7.5	13.0	5.0	25.0	3.6	3.0	0.8	1.6	1.6	0.60
FMOV05270-D	5.5	7.5	13.0	5.0	25.0	3.8	3.0	0.8	1.6	1.7	0.60
FMOV05330-D	5.5	7.5	13.0	5.0	25.0	3.3	3.0	0.8	1.6	1.6	0.60
FMOV05390-D	5.5	7.5	13.0	5.0	25.0	3.5	3.0	0.8	1.6	1.8	0.60
FMOV05470-D	5.5	7.5	13.0	5.0	25.0	3.7	3.0	0.8	1.6	1.9	0.60
FMOV05560-D	5.5	7.5	13.0	5.0	25.0	4.0	3.0	0.8	1.6	2.0	0.60
FMOV05680-D	5.5	7.5	13.0	5.0	25.0	4.3	3.0	0.8	1.6	2.2	0.60
FMOV05820-D	5.5	7.5	13.0	5.0	25.0	3.3	3.0	0.8	1.6	1.5	0.60
FMOV05101-D	5.5	7.5	13.0	5.0	25.0	3.6	3.0	0.8	1.6	1.5	0.60
FMOV05121-D	5.5	7.5	13.0	5.0	25.0	3.8	3.0	0.8	1.6	1.6	0.60
FMOV05151-D	5.5	7.5	13.0	5.0	25.0	4.1	3.0	0.8	1.6	1.8	0.60
FMOV05181-D	5.5	7.5	13.0	5.0	25.0	3.2	3.0	0.8	1.6	1.5	0.60
FMOV05201-D	5.5	7.5	13.0	5.0	25.0	3.3	3.0	0.8	1.6	1.5	0.60
FMOV05221-D	5.5	7.5	13.0	5.0	25.0	3.4	3.0	0.8	1.6	1.6	0.60
FMOV05241-D	5.5	7.5	13.0	5.0	25.0	3.5	3.0	0.8	1.6	1.7	0.60
FMOV05271-D	5.5	7.5	13.0	5.0	25.0	3.7	3.0	0.8	1.6	1.8	0.60
FMOV05301-D	5.5	7.5	13.0	5.0	25.0	3.9	3.0	0.8	1.6	1.9	0.60
FMOV05331-D	5.5	7.5	13.0	5.0	25.0	4.0	3.0	0.8	1.6	2.0	0.60
FMOV05361-D	5.5	7.5	13.0	5.0	25.0	4.1	3.0	0.8	1.6	1.7	0.60
FMOV05391-D	5.5	7.5	13.0	5.0	25.0	4.2	3.0	0.8	1.6	1.8	0.60
FMOV05431-D	5.5	7.5	13.0	5.0	25.0	4.4	3.0	0.8	1.6	1.9	0.60
FMOV05471-D	5.5	7.5	13.0	5.0	25.0	4.6	3.0	0.8	1.6	2.0	0.60
FMOV05511-D	5.5	7.5	13.0	5.0	25.0	4.8	3.0	0.8	1.6	2.2	0.60
FMOV05561-D	5.5	7.5	13.0	5.0	25.0	5.0	3.0	0.8	1.6	2.3	0.60
FMOV05621-D	5.5	7.5	13.0	5.0	25.0	5.3	3.0	0.8	1.6	2.5	0.60
FMOV05681-D	5.5	7.5	13.0	5.0	25.0	5.4	3.0	0.8	1.6	2.7	0.60
FMOV05751-D	5.5	7.5	13.0	5.0	25.0	5.6	3.0	0.8	1.6	2.9	0.60





Unit: mm

NOTE : Specification subject to change without notice.

2025/5/8







10. Tape and Reel Specifications

**Figure: A****Figure: B****Figure: C****Figure: D**

Straight Leads

Inline Kink Leads

**Figure: E****Figure: F****Figure: G****Figure: H**

Inside Kink Leads

Outside Kink Leads

Symbol	Parameter	FMOV05-D Series
P	Pitch of Component	12.7±1.0
P0	Feed Hole Pitch	12.7±0.2
P1	Feed Hole Center Lead	3.85±0.7
P2	Hole center to Component Center	6.35±0.7
F	Lead to Lead Distance	5.0±0.8
Δh	Component Alignment	2.0 Max
W	Tape Width	18.0+1.0 -0.5
W0	Hold Down Tape Width	5.0 Min
W1	Hole Position	9.0+0.75 -0.50
W2	Hold Down Tape Position	3.0 Max
H	Height from Tape Center to Component Base	18.0+2.0 -0
H0	Seating Plane Height	16.0±0.5
H1	Component Height	29.0 Max
D0	Feed Hole Diameter	4.0±0.2
t	Total Tape Thickness	0.7±0.2
L	Length of Clipped Lead	11.0 Max
Figure		ACEG

Unit: mm**NOTE : Specification subject to change without notice.**

 FUZETEC TECHNOLOGY CO., LTD.	NO.	FMOV05-D Series		
	Product Specification and Approval Sheet	Version	2	Page 11/14


11. Packaging Specifications

Bulk Product Packing

Series	Straight Lead Type Quantity (pcs/bag)	Outside Kink Lead Type Quantity (pcs/bag)	Inside Kink Lead Type Quantity (pcs/bag)	In Line Kink Lead Type Quantity (pcs/bag)
FMOV05-D Series	1000	1000	1000	1000

Tape & Reel Product Packing


Series	A (mm)	Quantity (pcs/reel)
FMOV05(180~391)-D-T-	43	2000
FMOV05(431~751)-D-T-		1500

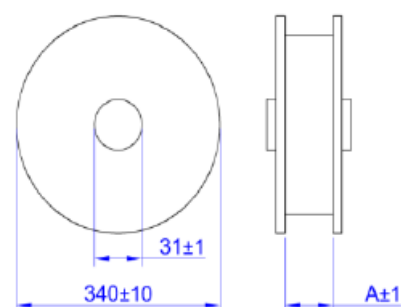

Box Product Packing

Series	Quantity (pcs/reel)
FMOV05(180~621)-D-A-	1000
FMOV05(681~751)-D-A-	800


Series	L±5	W±5	H±5
FMOV05-D Series	340	245	45

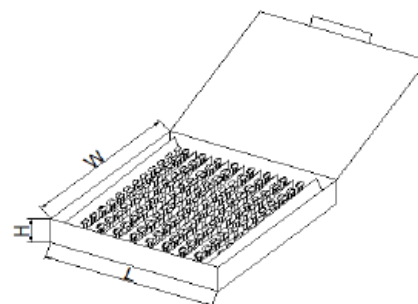

NOTE : Specification subject to change without notice.



12. Solder Recommendation

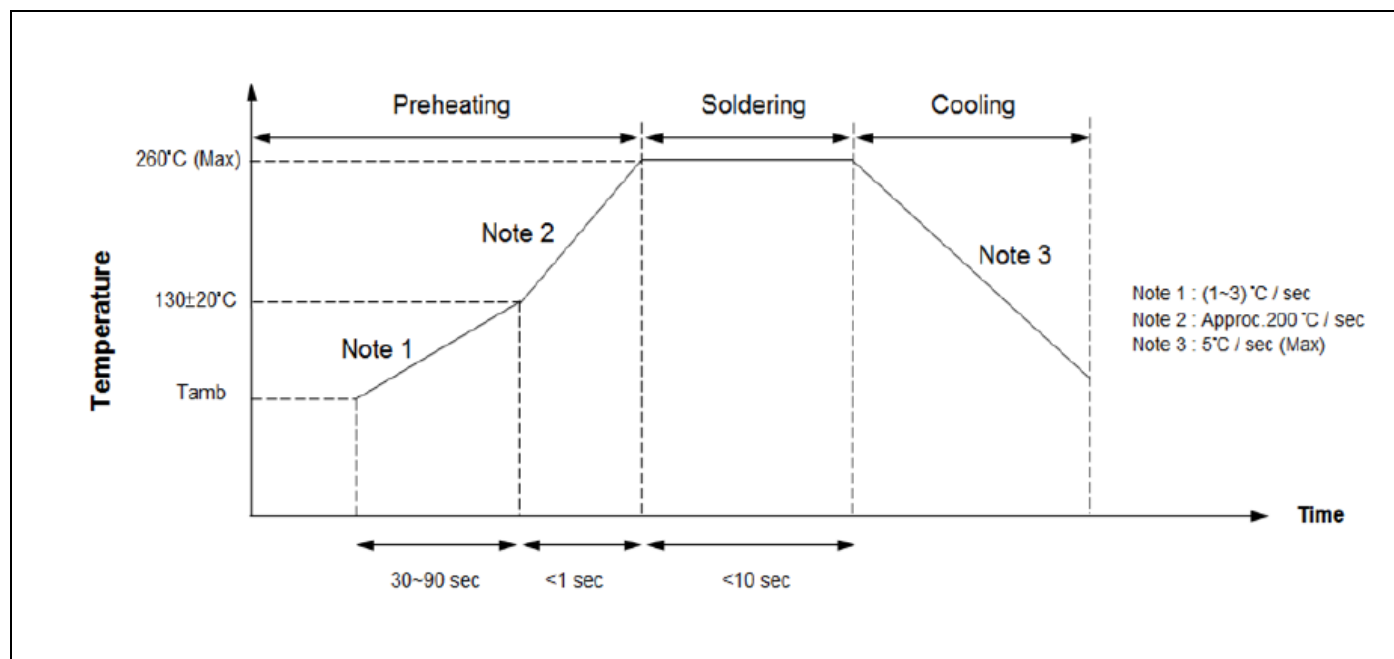

Recommendation Reworking Conditions with Soldering Iron

Item	Conditions
Temperature of soldering Iron-tip	360°C (Max)
Soldering Time	3 sec (Max)
Distance from Varistor	2mm (Min)

RoHS Compliant Declaration

We hereby declare that the components delivered to your company are compliant with RoHS Directive 2002/95/EC

Storage Conditions of Products

(I) Storage Conditions:

- Storage Temperature: -10°C ~ +40°C
- Relative Humidity: ≤ 75%RH
- Keep away from corrosive atmosphere and sunlight
- Solvent Resistance: MIL-STD-202, Method 215F
- Moisture Sensitivity: Level 1, J-STD-020


(II) Period of Storage: 1 year

NOTE : Specification subject to change without notice.


 FUZETEC TECHNOLOGY CO., LTD.	NO.	FMOV05-D Series		
Product Specification and Approval Sheet	Version	2	Page	13/14

13. Part Numbering and Marking System

Part Numbering System

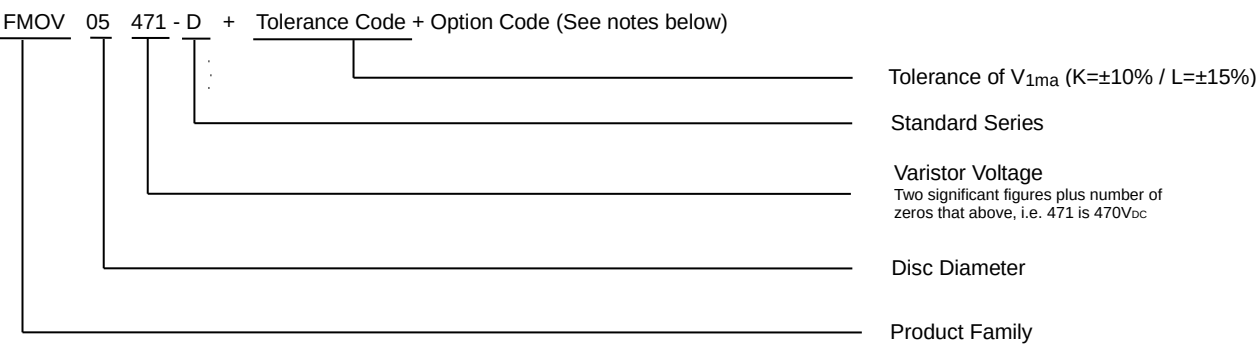

Marking System

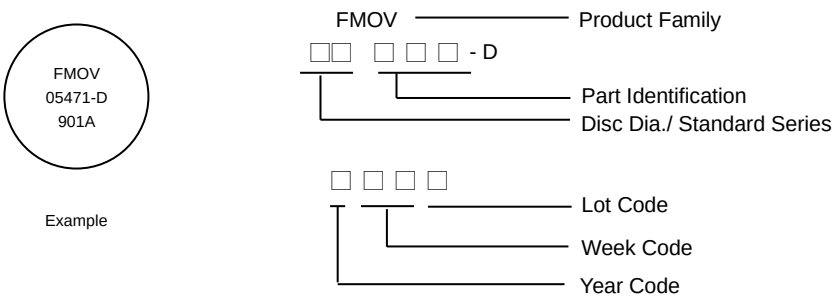

NOTE : Specification subject to change without notice.

 FUZETEC TECHNOLOGY CO., LTD.		NO.	FMOV05-D Series		
Product Specification and Approval Sheet		Version	2	Page	14/14

14. Order Notes:

Main Part Code:

Part No + Tolerance Code + Packaging + Lead Type Designators + Option Code

Ordering examples:

Straight Lead Bulk Pack (Standard)	Straight Lead (Short Cut) Bulk Pack	Straight Lead Tape & Reel Pack	Straight Lead Flat Box Pack	Tape & Reel Pack Feed Hole Pitch
FMOV05471-DKBS	FMOV05471-DKBSXXX	FMOV05471-DKTS	FMOV05471-DKAS	FMOV05471-DKTSA
				FMOV05471-DKTSB
Outside Kink Lead Bulk Pack	Outside Kink Lead (Short Cut) Bulk Pack	Outside Kink Lead Tape & Reel Pack	Outside Kink Lead Flat Box Pack	A: P₀ → 12.7mm±0.2mm B: P₀ → 15.0mm±0.2mm
FMOV05471-DKBO	FMOV05471-DKBOXXX	FMOV05471-DKTO	FMOV05471-DKAO	
Inside Kink Lead Bulk Pack	Inside Kink Lead (Short Cut) Bulk Pack	Inside Kink Lead Tape & Reel Pack	Inside Kink Lead Flat Box Pack	
FMOV05471-DKBK	FMOV05471-DKBKXXX	FMOV05471-DKTK	FMOV05471-DKAK	
In Line Kink Lead Bulk Pack	In Line Kink Lead (Short Cut) Bulk Pack	In Line Kink Lead Tape& Reel Pack	In Line Kink Lead Flat Box Pack	
FMOV05471-DKBI	FMOV05471-DKBIXXX	FMOV05471-DKTI	FMOV05471-DKAI	