




# FUZETEC

## International Universal Recycling Codes



PAP 22  
Paper / Stickers

LDPE 4  
Outer bag

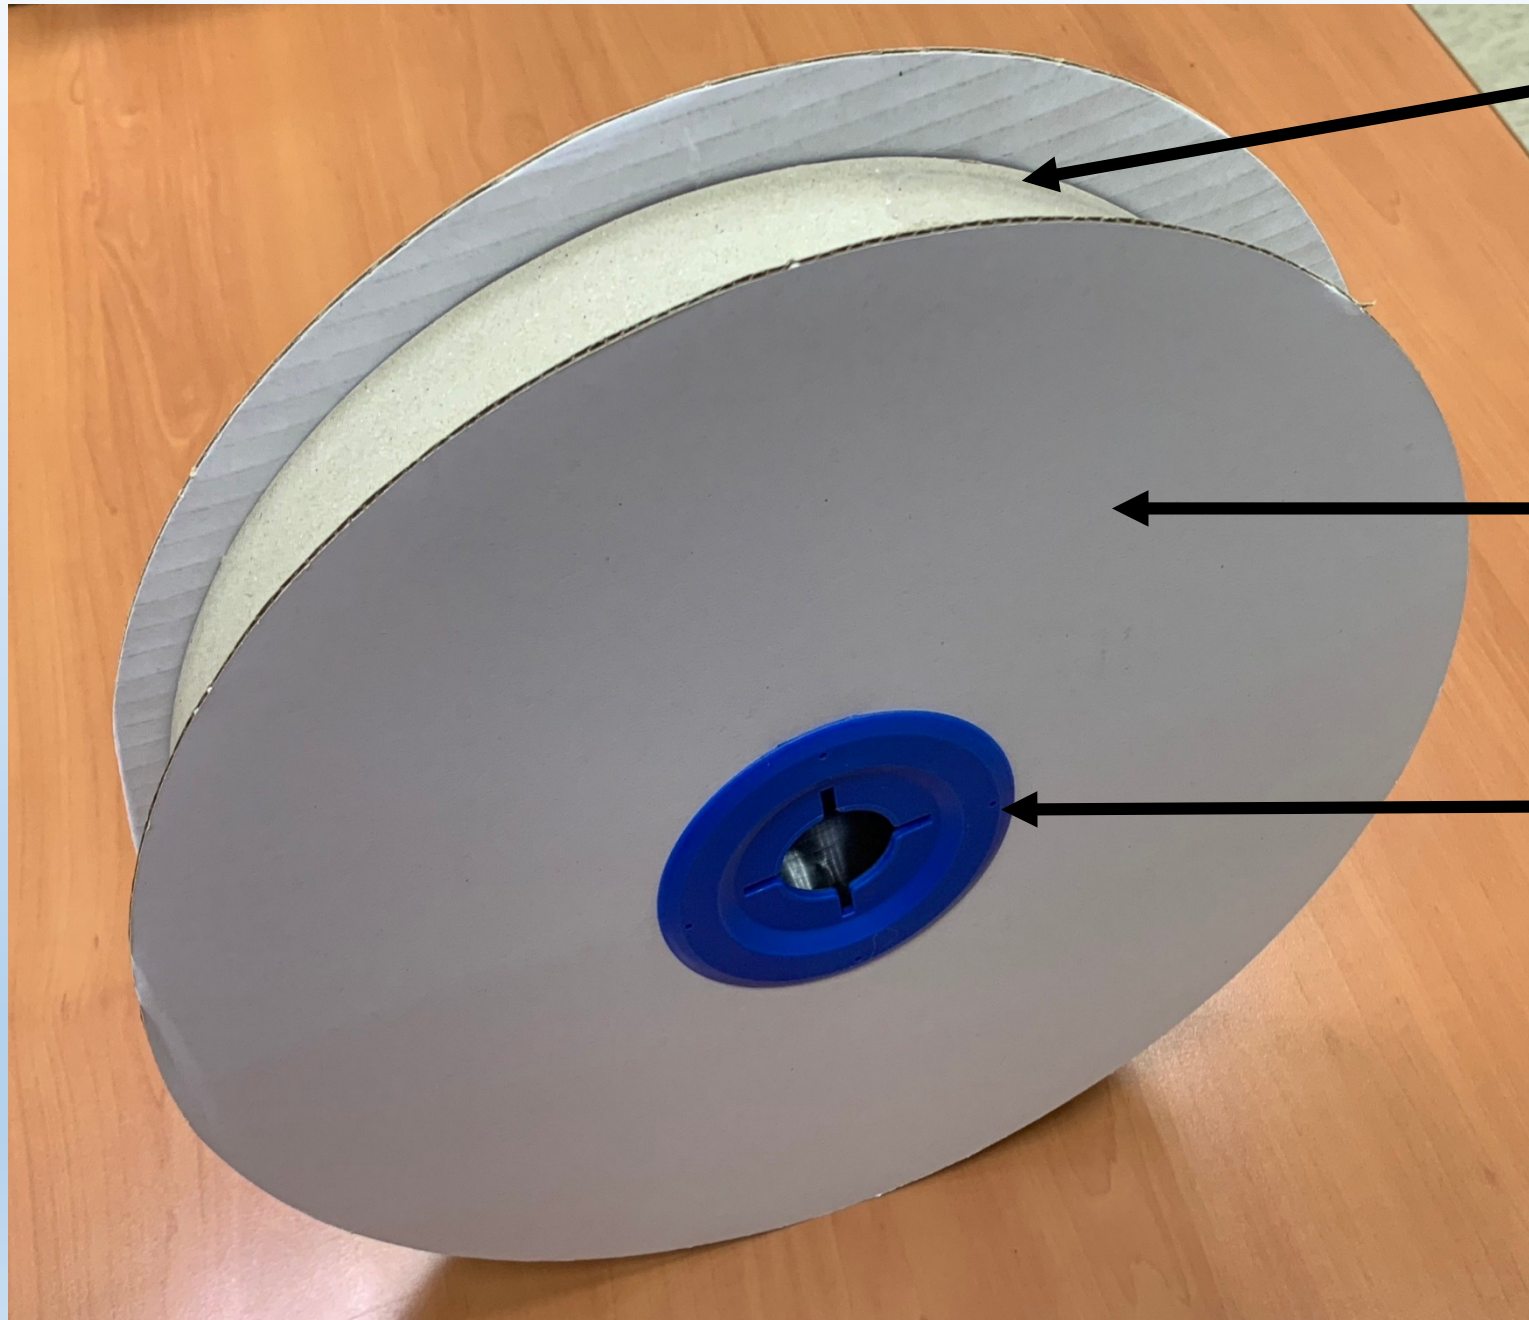

PAP 22  
Paper

PAP 20  
Corrugated fiberboard

HDPE 2  
High density polyethylene

90  
SMD Plastic / Aluminium Bag

PAP 22  
Paper / Stickers

**FUZETEC**  
Part No:FSMD020-1206  
Lot No: 2ANX  
Quantity: 3000 PCS  
P/N:  
Recognized:    




**Caution**  
This bag contains  
MOISTURE-SENSITIVE DEVICES


LEVEL  
2a

1. Peak package body temperature: 260 °C
2. After bag is opened, devices that will be subjected to reflow solder or other high temperature process must
  - a) Mounted within: 4 weeks of factory conditions  
<30°C/60% RH, OR
  - b) Stored at <10% RH
3. Devices require bake, before mounting, if:
  - a) Humidity Indicator Card is > RH 10%  
when read at 23±5°C
  - b) 2(a) or 2(b) not met
4. If baking is required, devices may be baked for 48 hours  
at 60±5°C

Note: Level and body temperature defined by IP C/JEDEC J-STD-020

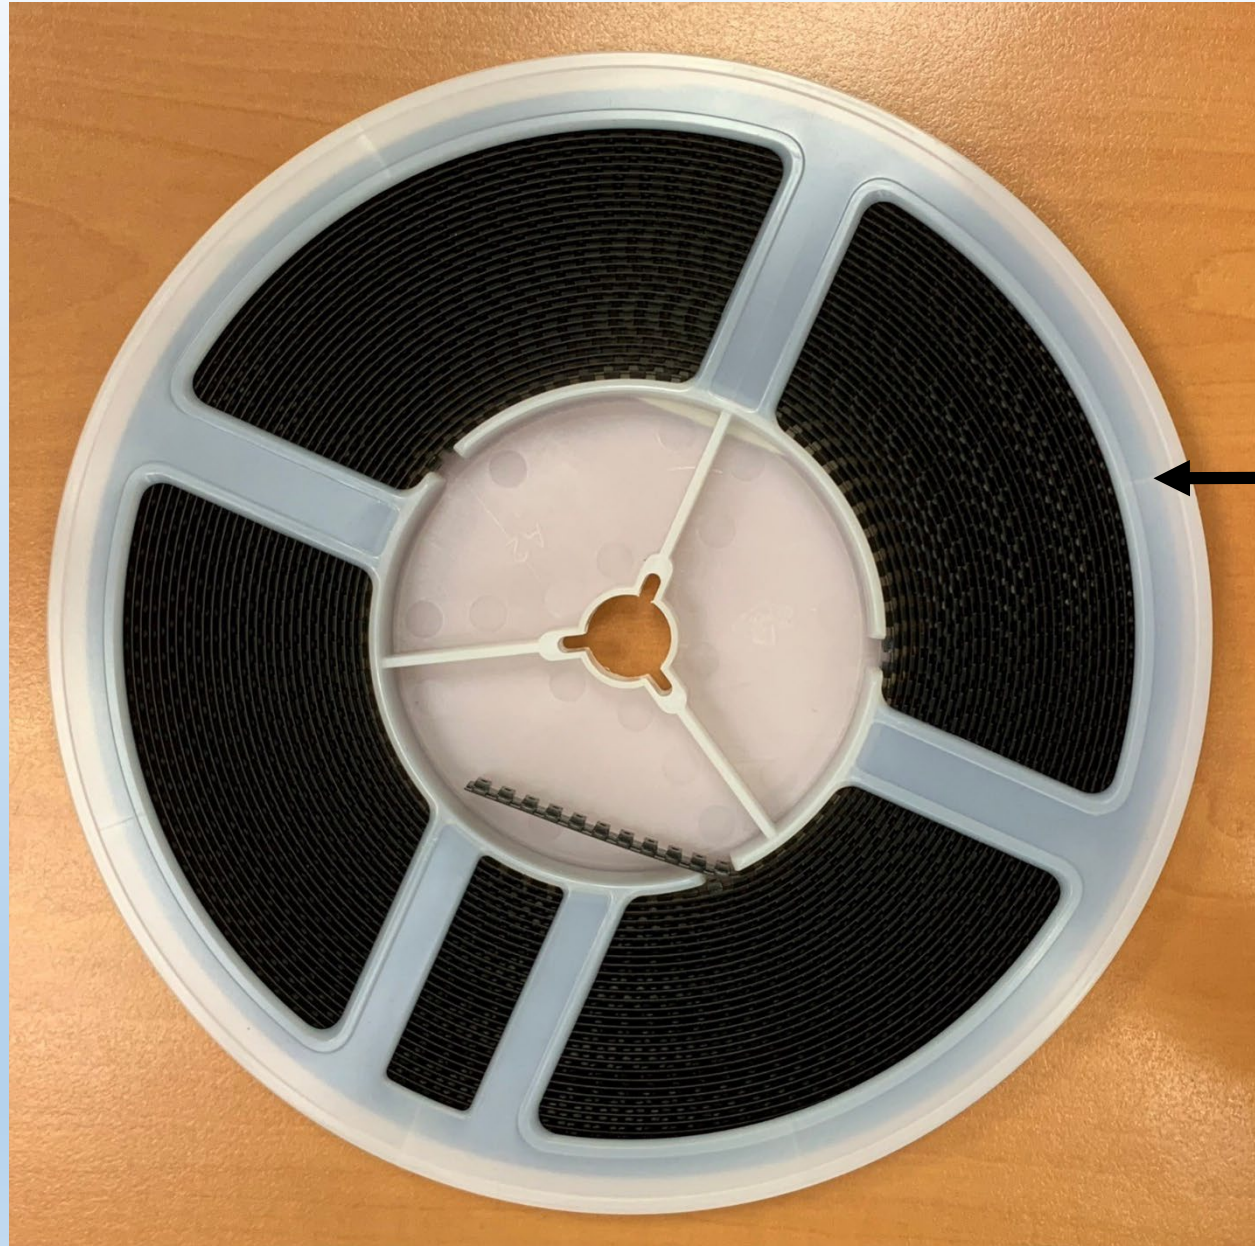

PS 6  
SMD Reel

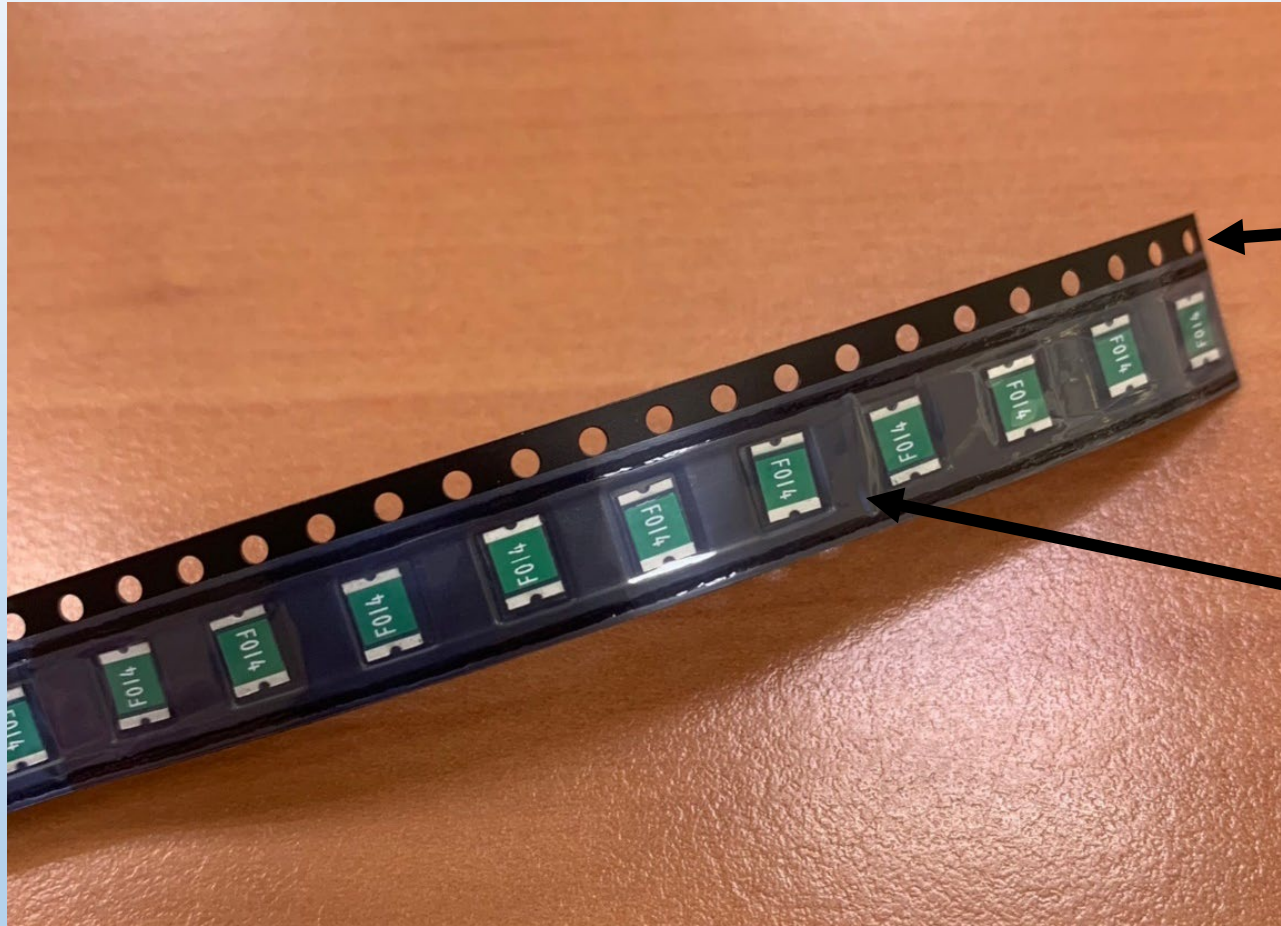

PS 6  
Carrier tape  
Polystyrene (black part)

PET 1  
Cover tape  
Polyethylene terephthalate  
(transparent part)

**COBALT DICHLORIDE FREE**

Read At Lavender Between  
Pink(wet) And Blue(dry)

**BAKE  
UNITS  
IF PINK**

15%



**BAKE  
UNITS  
IF PINK**

10%



**CHANGE  
DESICCANT  
IF PINK**


5%




HUMIDETEC<sup>®</sup> HUMIDITY INDICATOR ITEM NO.: AH360E

**DISCARD IF CIRCLES OVERRUN. AVOID  
METAL CONTACT.**

PAP 22  
Paper

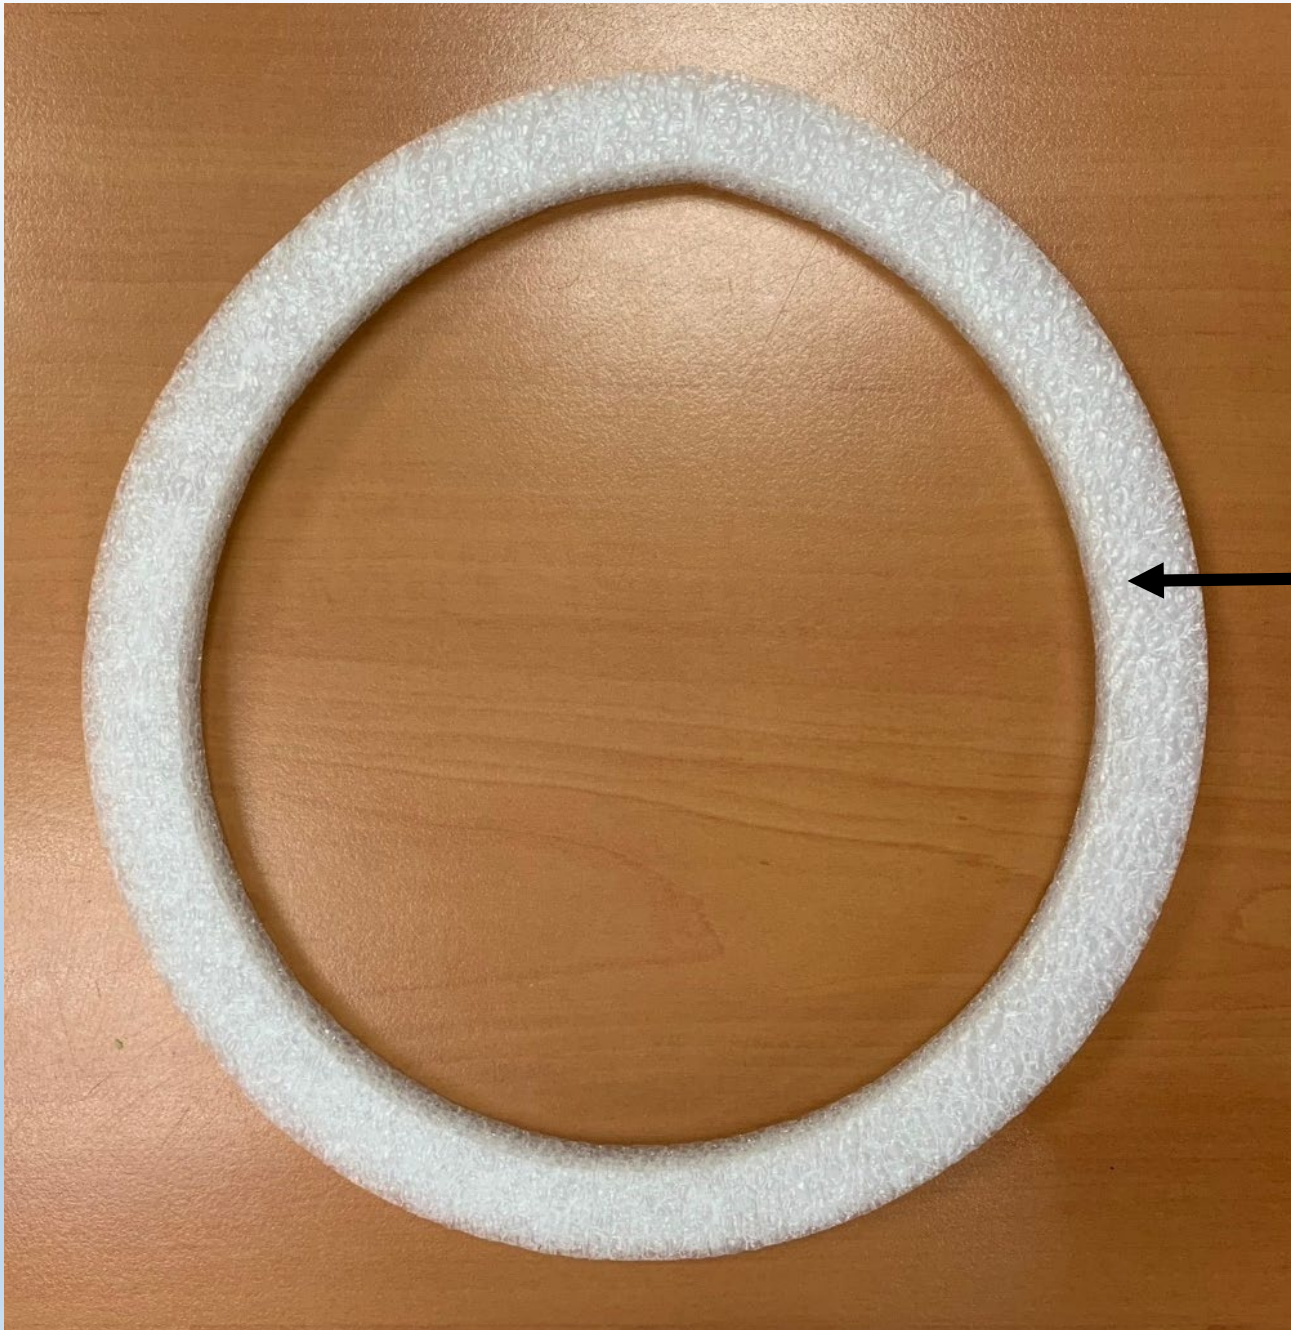

LDPE 4  
SMD Buffering Ring Tap

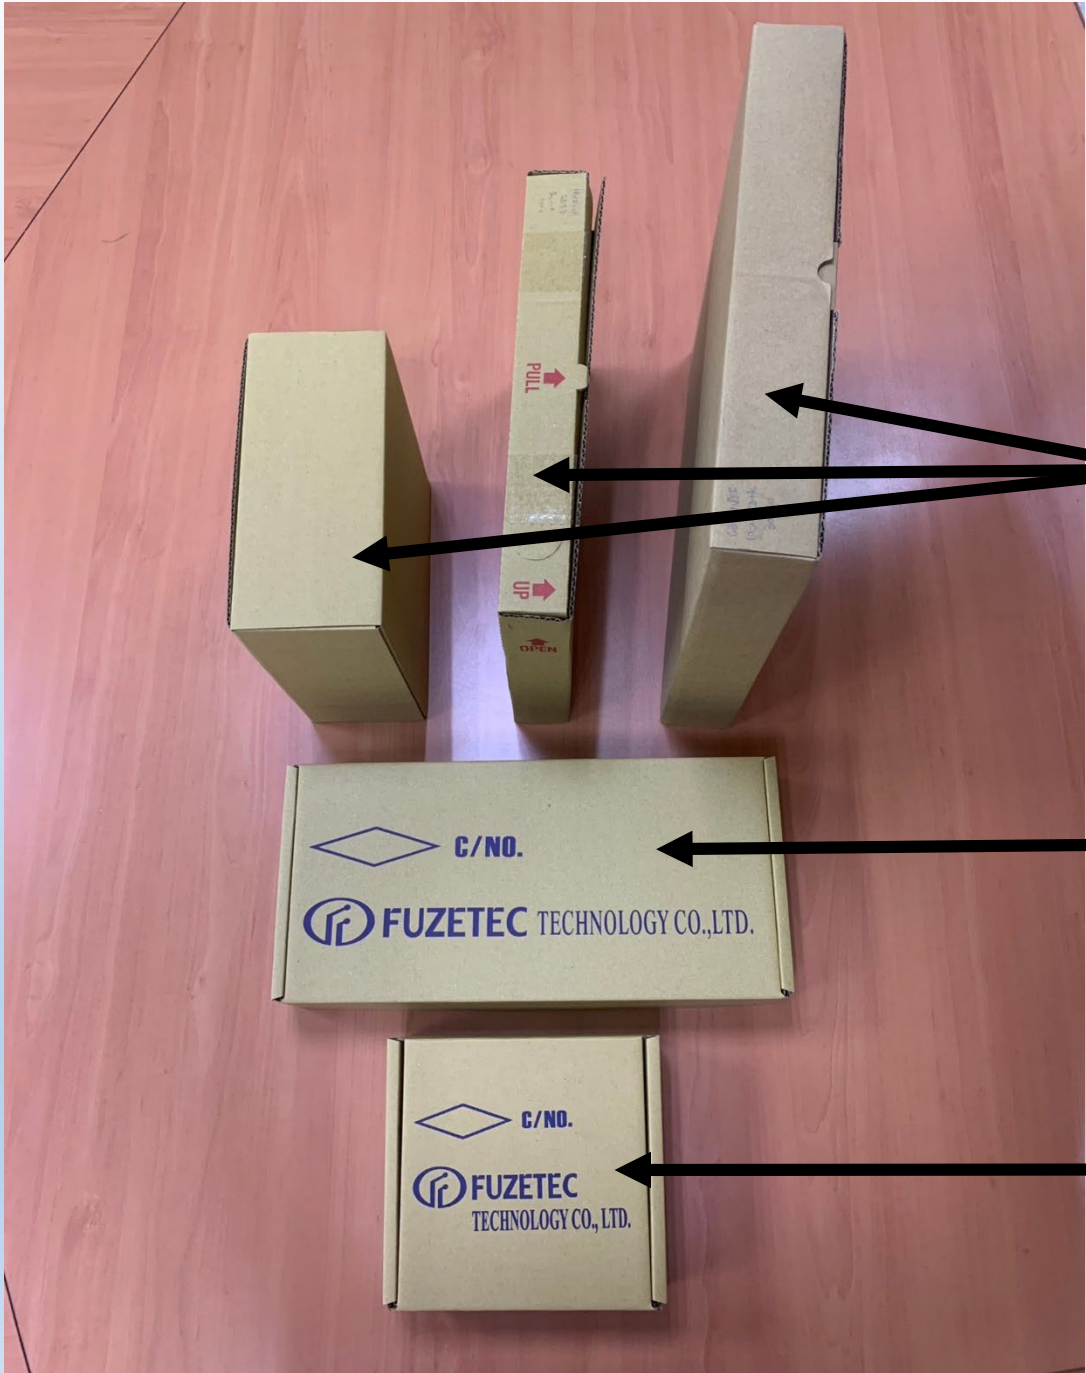


PAP 20  
Inner box

PAP 20  
Inner box

PAP 20  
Inner box



HDPE 2  
Buffering air bag  
High density polyethylene

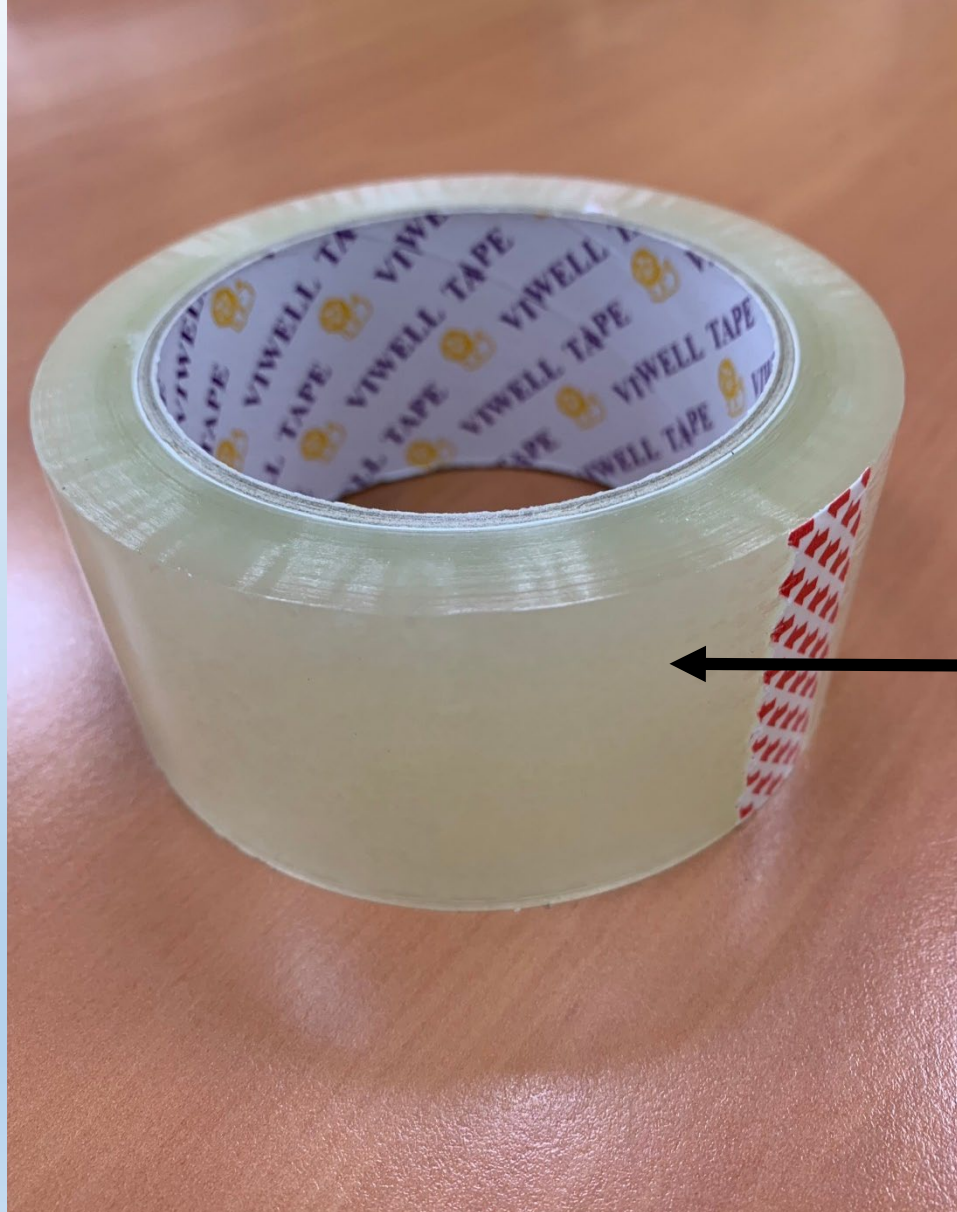

LDPE 4  
Packaging tape



LDPE 4  
Packaging tape

PAP 22  
Paper / Stickers

PP 5  
Strapping (yellow)

PAP 20  
Outer box